



PV INVERTER

Commercial Series / M50A_260

Features

- Toggle latch and fast installation design reduce installation efforts
- Bluetooth and SUB_1G for quick commission via APP
- Fuseless design
- 6 MPP Trackers
- IV curve scanning, night time reactive power and anti-PID function
- IP66 and lightweight design
- Built-in DC switches, SPD and string monitoring
- Smart cooling system

www.deltaww.com



Product Overview

Delta M50A_260 is able to reach 98.7% peak efficiency, 98.3% Euro-efficiency over converting PV energy. 6 sets of MPPT allows more flexibility when PV arrays are facing different directions while minimizing energy losses and maximizing higher yields.



Feature Highlights


Swappable Fan Kit

Smart cooling system enhance the total plant performance and minimizing the noise.

SUB_1G
(optional)

Wireless Communication APP


DeltaSolar APP provides quick on-site commission and total plant monitoring solution.

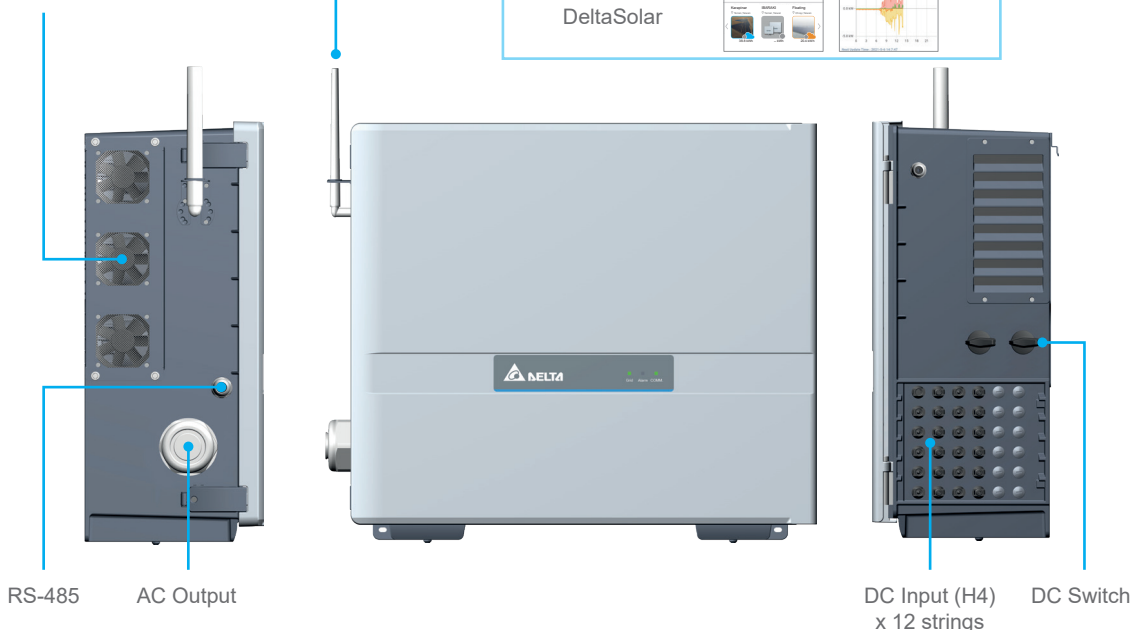


Fast Installation

The M50A_260 supports wall mount installation and ground mount installation, which can shorten installation times and save on the cost for additional racks.

Wall Mount



Ground Mount



Toggle Latch Design

The toggle latch design saves considerable time for maintenance and minimizes the risk of water intrusion.



Specifications

Model Number	M50A_260				
DC Input					
Max. Input Voltage	1100 V				
Operating Voltage Range	200 - 1000 V				
Mpp Voltage Range (Full Power)	390 - 900 V ¹⁾				
Start Voltage	> 250 V				
Nominal DC Voltage	600 V				
Max. Input Current	Each MPPT: 26 A, Total: 132 A				
MPP Tracker	6				
Connection Type	2 / MPPT (fuse not required), Amphenol H4 DC Connector				
DC Switch	Built-in				
Surge Protection	Type II SPD (built-in) ; Type I+II SPD (optional)				
AC Output					
Max. Output Power	55 kVA ²⁾				
Max. Output Current	83 A				
AC Output Power	50 kW				
Nominal AC Voltage	3Ph 230 / 400V Y or Δ				
Operating Voltage Range	80% to 130% of Nominal AC Voltage				
Operating Frequency Range	50 / 60Hz ± 5Hz				
Power Factor (Adjustable)	0.8 ind - 0.8 cap				
Protection	Type II SPD (built-in) ; Type I+II SPD (optional)				
T.H.D	< 3%				
Night Time Consumption ³⁾	< 3.5 W				
Efficiency					
Peak Efficiency	98.7%				
Euro Efficiency	98.3%				
Information					
Communication Port	RS-485, Bluetooth (built-in) ; SUB_1G (optional)				
Dispaly	LED (Grid, Alarm, COMM.)				
Certification					
	IEC 62109-1/-2 EN 61000-6-2	EN 61000-6-3 VDE-AR-N 4105	VDE 0124-100 VDE-AR-N 4110	NB/T 32004: 2018 CNS 15382	GB/T 19964: LVRT
General Data					
Protection	Arc fault detection, DC reverse polarity detection, Leakage current protection, Insulation resistance detection				
Features	Night time Anti-PID, String current monitoring, IV curve scanning, Night time reactive power				
Operating Temp. Range	-25 to +60°C (Derating Above 50°C)				
Protection Level	IP66				
Operating Elevation	< 4000 m				
Cooling	Smart fan air cooling				
Noise	65 dBA @1m, Amb25°C				
Dimension (W x H x D)	699 x 629 x 264 mm				
Weight	64 kg				

1) Ambient < 40°C: 390 - 900V ; Ambient < 50°C: 390 - 850V

2) Ambient < 40°C ; Vdc: 505 - 800V

3) Night time consumption with standby communication

*All specifications are subject to change without prior notice



Delta Electronics, Inc.

39 Section 2 Huandong Road, Shanhua District,
Tainan City 74144, Taiwan (R.O.C.)

TEL : +886 6 505-6565

FAX : +886 6 505-1919

info@deltaww.com